

Plastex Extruders Ltd



Russell Gardens, Wickford, Essex, SS11 8DN
Sales Tel: +44(0)1268 571116 Fax: +44(0)1268 560027
www.plastex.co.uk e-mail: sales@plastex.co.uk



PRODUCT DATA SHEET: Plastex Chex

Jun-12

Sizes & weights	Height	Dimensions	Weight
All dimensions are nominal Tolerances	+/-0.5	+/- 1	
	mm	cm	kg/m ²
	Plastex Chex	14	50cm x 50cm

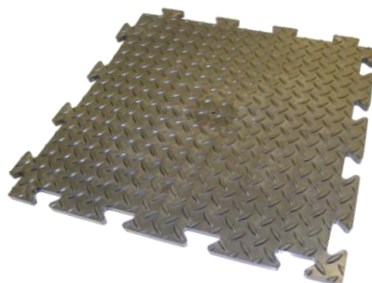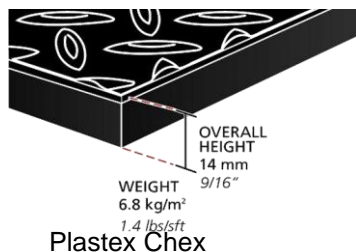

General

APPEARANCES	Solid grid with checker plate design.
COLOURS	Available in homogenous standard colour; Black.
DURABILITY	One piece welded construction for maintenance free life.
WORKABILITY	Heavy duty tiles with interlocking jigsaw mechanism.
USES	Heavy duty for work stations, finishing/assembly areas, laboratories, localised workcells and machine shops.

Technical data

ACOUSTIC	Excellent sound absorption properties.
CHEMICAL	Resistant to most acids, alkalines and oils. For specific chemical resistances, see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline
COMPOSITION	Flexible DINP plasticised Polyvinyl Chloride (PVC).
ENVIRONMENT	Made from 100% post-industrial recycled PVC. Plastex does not use any substances currently included in the SVHC (Substances of Very High Concern) list under R.E.A.C.H.* in any matting products. 100% recyclable. * Registration, Evaluation, Authorisation and Restriction of Chemical substances
FIRE	UL 94 V-2
HYGIENE	Non-porous PVC - Inhibits the growth of bacteria.
REVERSION	Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments (refer to www.plastexmatting.com/matfax/doc.php?doc_id=254&action=inline).
SLIP RESISTANCE	BS EN 7188
THERMAL	Functional -23°C +60°C (slight size variation may occur at temperature extremes).
UV LIGHT	Resistant to PVC degradation; uncoloured PVC material - BS EN 607 = Delta E 1.02.