

PLASTEX GRID

Heavy duty rigid grid tiling

A versatile flooring solution in multiple industrial applications.

Rigid polyethylene grid tiles with a secure, quick and easy 'lock-fit' connection, Plastex Grid provides a raised floor surface standing 25mm (1") above ground.



BENEFITS

- Open grid or solid grid design
- Good slip resistance
- Resistant to detergents, industrial chemicals and acids
- 25mm (1") high surface
- Effective coverage of large areas

FEATURES


- Open grid for removal of large volumes of liquid
- Textured surface
- Made from rigid polyethylene
- Withstands weights of up to 50 T/m²
- Secure 'lock fit' connection

STANDARD COLOURS


PLASTEX GRID OPEN




RED



DARK GREY



BLUE



GREEN



WHITE


PLASTEX GRID CLOSED



RED

STANDARD SIZES

PRODUCT	HEIGHT	STANDARD TILE SIZE	WEIGHT
Plastex Grid Open	25mm (1")	50 x 50cm (1'8" x 1'8")	3.6 kg/m ² (0.66 lbs/sft)
Plastex Grid Closed	25mm (1")	50 x 50cm (1'8" x 1'8")	4.4 kg/m ² (0.80 lbs/sft)

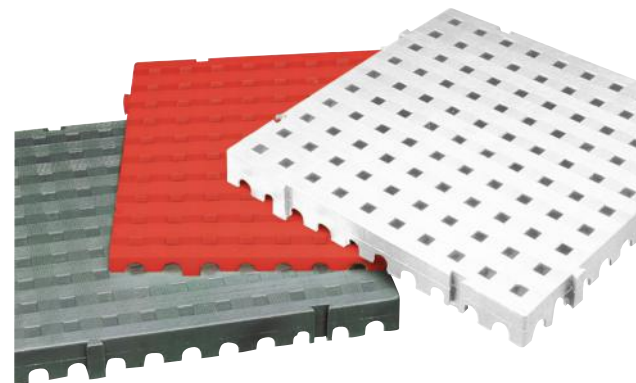


PRODUCT DATA SHEET: PLASTEX GRID


Apr-17

SIZES & WEIGHTS

	All dimensions are nominal	Height (mm)	Dimensions (cm)	Weight (kg/m ²)
	Tolerances (mm)	+/- 0.5	+/- 1	
Plastex Grid Open	25	50 x 50	3.6	
Plastex Grid Solid	25	50 x 50	4.4	



Plastex Grid Open



Plastex Grid Solid

GENERAL

APPEARANCES

Plastex Grid Open: Open grid surface.
Plastex Grid Solid: Solid Grid surface.

COLOURS

Plastex Grid Open: Red, Dark Grey, Blue, Green, White.
Plastex Grid Solid: Red, Dark Grey.

DURABILITY

LLDPE construction.

WEIGHT RESISTANCE Withstands 50 T/m².

WORKABILITY

Rigid grid tiles with secure lock fit connection. Not self-supporting: to be used on flat floors only.

USES

Heavy duty industrial applications.

TECHNICAL DATA

CHEMICAL

Resistant to most acids, alkalines and oils.

COMPOSITION

Linear low density polyethylene (LLDPE).

HYGIENE

Non-porous 100% LLDPE - Inhibits the growth of bacteria.

THERMAL

Functional from -60°C to + 70°C (slight size variation may occur at temperature extremes).

WARRANTY

2 years. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf

ANCILLARIES



25mm x 66mm x 2m
 (1" x 2 3/4" x 6'6")

66mm PVC Aluminium edging strip

Supplied in sections of 2m (6'6") length with fixing screws and plugs

Colours: Anodised Aluminium